


# RS9110T

Programmable Thermostat  
Single Stage – 1 Heat / 1 Cool

Robertshaw®

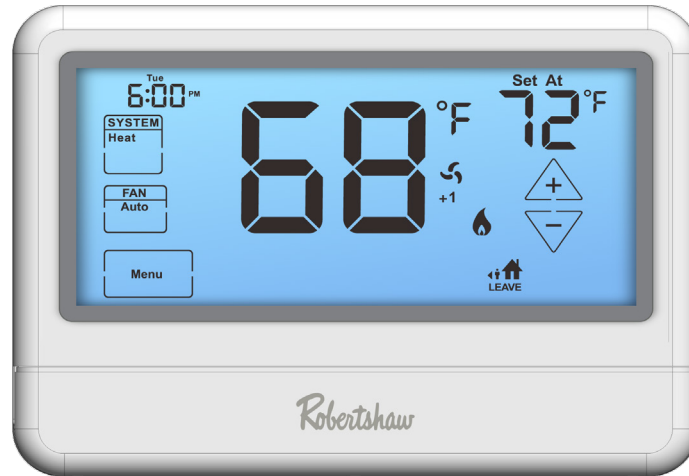

## Description

Contractors can offer owners easy, yet powerful and reliable single-stage heating and cooling control in a simple, modern design with the RS9110T programmable wall thermostat.

## Features and Benefits

- Quick, easy installation
- Modern, user-friendly design and operation
- 7-day, 5-1-1 or non-programmable
- Large 12.9-square-inch blue backlit touchscreen display
- Auto changeover
- Adjustable temperature differential (swing)
- Filter change reminder (selectable on/off)
- Adjustable heat and cool setpoint limits
- IAQ Mode (selectable number of cycles and duration)
- Simplify installation with our push-in terminals
- Secure your device with the Keypad Lock feature

**6** Year  
Limited  
Warranty

Robertshaw  
RANCO • PARAGON • CASTFUTURA

**Customer Service**  
+1 800 304 6563  
HVACCustomerService  
@robertshaw.com

**Technical Service**  
+1 800 445 8299  
TechnicalService  
@robertshaw.com

[www.robertshaw.com](http://www.robertshaw.com)  
©2025 Robertshaw  
01/25 150-2800 RevC

# Specifications

|                                     |  |
|-------------------------------------|--|
| Dimensions (W x H x D)              | 5.3 x 3.8 x 1 in. (136 x 98 x 26 mm)   |
| Mounting                            | Wall or junction box   |
| System compatibility                | Single-stage heating and cooling   |
| System fuel source                  | Gas, electric or oil   |
| Heat pump compatibility             | Systems without auxiliary or emergency heat  |
| Millivolt application compatibility | Yes  |
| Temperature range                   | 32°F to 99°F (1°C to 40°C)   |
| Control temperature range           | 41°F to 90°F (5°C to 32°C)   |
| Display accuracy                    | ±1°C (at 20°C) / ±1°F (at 68°F)  |
| Power sources                       | 24V AC (18 to 30V AC), 50/60 Hz for hardwire (common wire required) or 2 AA 1.5V alkaline batteries (included) |
| Terminals                           | Rh, Rc, C, Y, W, G, O, B   |

## Replacement and Cross Reference

|                         |  |
|-------------------------|--|
| <b>RS9110T</b>          |  |
| Pro1°                   | T805   |
| Honeywell               | TH6110D1021, TH7220U1035, TH6220U2000, TH6210U2001, TH6220D1002, TH6220D1028 |
| Braeburn°               | 6100, 2020, 2020NC, 2000NC, 2030   |
| Emerson™ White-Rodgers™ | 1F83C-11PR, 1F75C-11PR, 1F80-0261, 1F80-361                                  |
| Aprilaire°              | 8463   |

